

MCHQ185VxA series

185W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment



■ Features:

- Universal AC input / Full range (Max. 305VAC)
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- Built-in active PFC function
- IP65 design for indoor and outdoor appliances
- Compliance to worldwide regulations for lighting
- Output voltage and constant current level adjustable by internal potentiometers



IP65 SELV

ELECTRICAL SPECIFICATION

MODEL	MCHQ185V12A	MCHQ185V24A	MCHQ185V36A
OUTPUT			
Rated Voltage	12V	24V	36V
Constant Current Region [2]	7.2 ÷ 12V	14.4 ÷ 24V	21.6 ÷ 36V
Rated Current	14A	7.7A	5.1A
Rated Power	168W	184.8W	185W
No Output Voltage (max.)	15V	30V	44V
Voltage Adjustment Range – Vadj potentiometer	10 ÷ 13.5V	22 ÷ 27V	33 ÷ 40V
Current Adjustment Range – Iadj potentiometer	8.4 ÷ 14A	4.6 ÷ 7.7A	3 ÷ 5.1A
Line Regulation	± 1%		
Load Regulation	± 3%		
Voltage Regulation [3]	± 3%		
Current Regulation [3]	± 5%		
Ripple & Noise (max.) [4]	400mV _{p-p}	800mV _{p-p}	800mV _{p-p}
Setup, Rise, Holdup time [5]	500ms, 30ms, 30ms		
INPUT			
Voltage Range	90 ÷ 305VAC		
Frequency Range	47 ÷ 63Hz		
Power Factor (typ.)	PF > 0.98 / 115VAC; PF > 0.95 / 230VAC at full load		
Efficiency (typ.)	92%	93.5%	94%
AC current (typ.)	2.2A / 115VAC; 1.05A / 230VAC		
Inrush current (max.)	45A / 230VAC(25°C)		

MCHQ185VxA series

185W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment



PROTECTIONS

Over Current	Range: 110 ÷ 160%		
	Type: constant current limiting to 60% rated voltage next hiccup mode. Recovers automatically after fault condition is removed.		
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.		
Over Voltage	Max. 18V	Max. 35V	Max. 50V
	Type: shut down output voltage. Re-power on to recovery.		
Over Temperature	Range: 110°C ± 10°C		
	Type: shut down output voltage. After temperature goes down re-power on to recovery.		

WORKING ENVIRONMENT

Working Temperature	-40°C ÷ 70°C (refer to Derating Curve)
Working Humidity	15 ÷ 95% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
Temperature Coefficient	± 0.05% / °C (-10°C ÷ 45°C)
Vibration	10 ÷ 500Hz, 2G, 10min / cycle, period 30min. each along X, Y, Z axes

SAFETY AND EMC REGULATIONS

Safet Standards	Compliance to EN61347-1, EN61347-2-13
Withstand Voltage	IN/OUT: 5.3kVDC/1min
Isolation Resistance	IN/OUT; IN/GND; OUT/GND: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547; EN61000-4-2, -3, -4, -5, -6, -8, -11; EN55024
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2 class C (≥ 100% load)

OTHERS

MTBF	225 000h MIL-HDBK-217F (25°C)
Dimensions	195 x 73.5 x 38.5mm (L x W x H)
Weight and Packing	1.0kg; 10pcs./box; box weight and dimensions: 10kg, 24.7 x 23 x 27cm

EAN	 5 902135 118337	 5 902135 118351	 5 902135 118375
------------	--	---	--


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Constant current operation region is within announced range. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
5. Setup and rise time is measured from 0 to 90% rated output voltage.
6. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

MCHQ185VxA series


185W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment




MECHANICAL SPECIFICATION

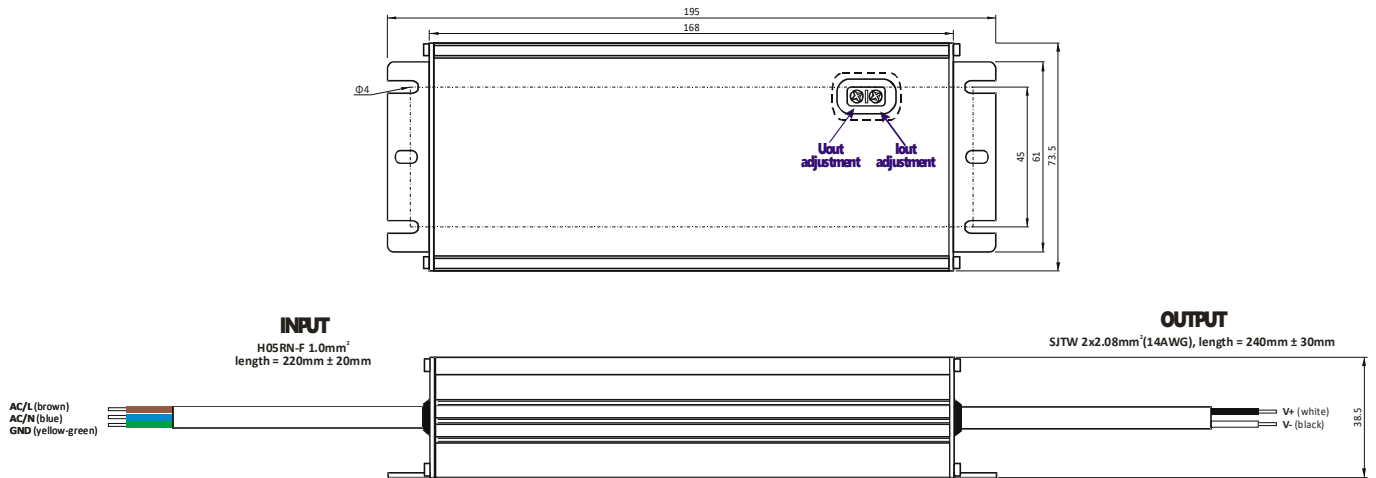

DERATING CURVE

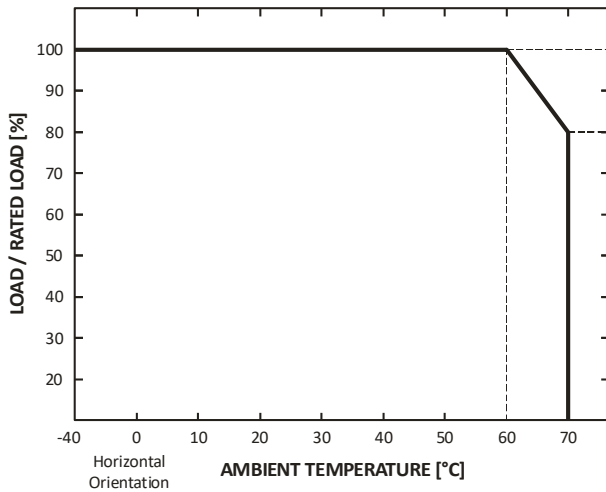

STATIC CHARACTERISTIC

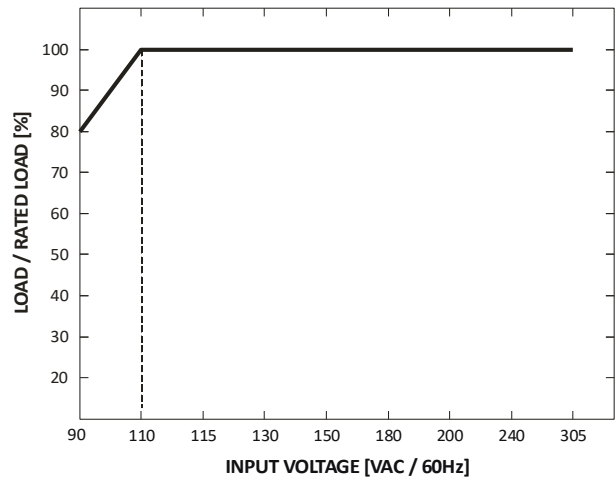

CONSTANT VOLTAGE + CONSTANT CURRENT MODE OPERATION

